


YUKA LIFT

Yük Taşıma Arabaları / Transport Trolleys

	No. of rollers	Dimensions of turnplate (mm)	Kol boyu/ ayarlanan genişlik boyu Length of handle / adjusting length of lever L (mm)	Ölçüler Overall size (mm)	Kapasite Capacity (ton)	Ağırlık Weight (kg)
YK-Y4+K4	4	150	800	230 x 230 x 110	8	28
	4	140 x 120	300 - 1000	170 x 140 x 110		
YK-Y8+K8	8	160	1100	560 x 420 x 110	16	72
	8	200 x 160	400 - 1300	200 x 200 x 110		
YK-Y12+K12	12	180	1100	750 x 450 x 110	24	100
	12	220 x 180	400 - 1400	256 x 200 x 110		
YK-Y16+K16	16	200	1100	936 x 500 x 110	32	124
	16	240 x 200	400 - 1500	310 x 220 x 110		
YK-Y18+K18	18	200	1500	780 x 550 x 110	36	138
	18	280 x 200	400 - 1500	300 x 550 x 110		

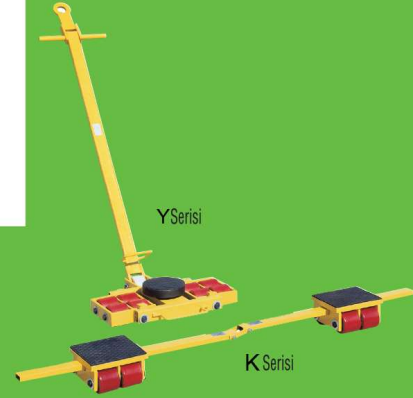

PA Serisi - Mini Elektrikli Vinç | PA Series - Mini Electric Hoist

	EHV 100/200	EHV 125/250	EHV 200/400	EHV 250/500	EHV 300/600	EHV 400/800	EHV 500/1000	
Model / Model								
Kaldırma kapasitesi / Lifting capacity	100 / 200	125 / 250	200 / 400	250 / 500	300 /	400 /	500 / 1000	kg
Kaldırma hızı / Lifting speed	10 / 5	10 / 5	10 / 5	10 / 5	10 / 5	10 / 5	10 / 5	m/min
Kaldırma yüksekliği / Lifting height	20 / 10	20 / 10	20 / 10	20 / 10	20 / 10	20 / 10	20 / 10	m
Güç / Input power	450	500	750	900	1050	1300	1600	W
Çalışma gerilimi / Rated Volt	230 - 50 Hz S3 %20 10 min							V
Paket ölçüleri / Packing dimensions	44 x 38 x 20	44 x 37 x 25	44 x 37 x 25	44 x 37 x 25	53 x 45 x 19	53 x 28 x 35	53 x 28 x 35	mm
Brüt-Net ağırlık / Gross - Net weight	24 / 22	25 / 24	30 / 29	36 / 34	41 / 38	44 / 40	31 / 30	kg

Kompakt yapı tasarımı sayesinde kolay kurulum. Compact structure design easy install.

Üst limit sistemi
Upper limit lever

Çelik halat
Wire rope

Alt kanca
The lower hook



Kablolu kumanda
Positive and negative switch

Besleme kablosu
Power plug